


Dimensions / Weight	
Dimensions H x W x D	125 x 120 x 55 cm
Weight	890 kg
Flue connexion	top
Center back connexion	- cm
Center to back top connection	21 cm
Center external air connection	20,8 cm
Flue pipe Ø	150 mm
Fresh air pipe Ø	100 mm
Minimum clearance to combustibles rear/side/front	40/40/90 cm
Dimensions window fireroom	35 x 50 cm
Fuel	firewood
Log length	40-45 cm
Pellet quantity	-

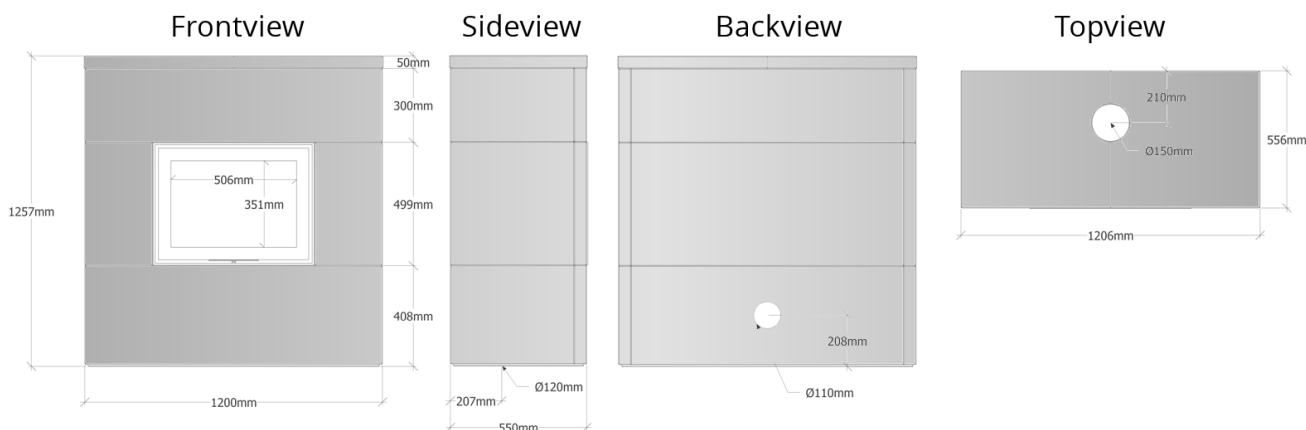

Performances	
Energy efficiency	81,8 %
Energy class	A+
Nominal heat output	6,3 kW
Min-Max heat output	3-8,5 kW
Heating capacity	45-180 m ³
Wood load / h	1,9 kg
Flue draft	11 Pa
Flue gas temp. at nominal heat output	223 ° C
Gas flow	5,9 g/s

Emission of combustion products	
CO % (at 13 % O ₂)	0,0638
CO mg/Nm ³	797
Nox mg/Nm ³	153
VOC mg/Nm ³	69
Dust mg/Nm ³	22
Test standard	EN 13240
Test report number	30-16552/T
Date	3/13/2023

Dimensions / Weight	
Dimensions H x W x D	155 x 120 x 55 cm
Weight	1032 kg
Flue connexion	top
Center back connexion	- cm
Center to back top connection	21 cm
Center external air connection	20,8 cm
Flue pipe Ø	150 mm
Fresh air pipe Ø	100 mm
Minimum clearance to combustibles rear/side/front	40/40/90 cm
Dimensions window fireroom	35 x 50 cm
Fuel	firewood
Log length	40-45 cm
Pellet quantity	-




Frontview

Sideview

Backview

Topview

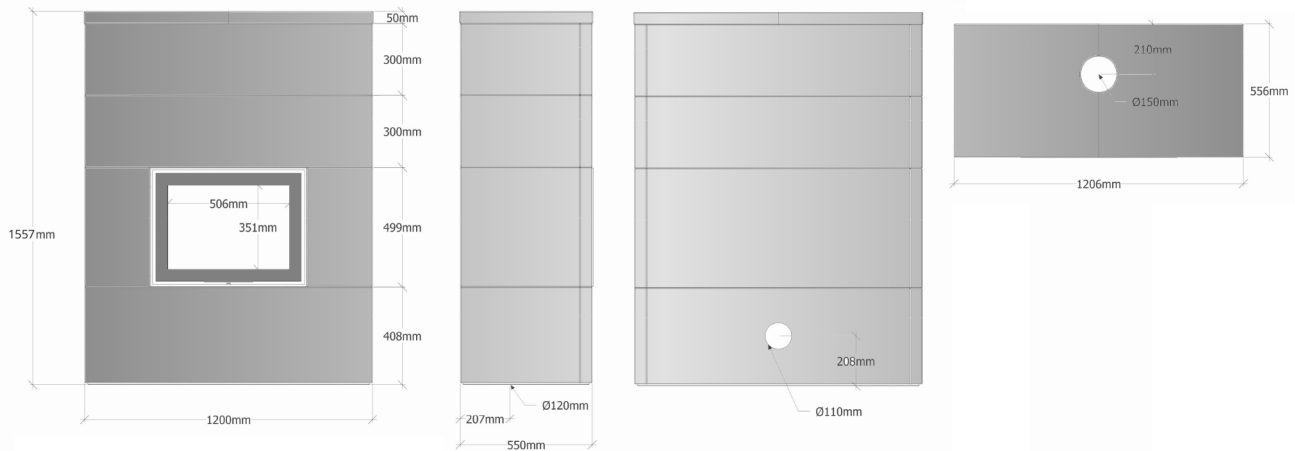

Performances

Energy efficiency	81,8 %
Energy class	A+
Nominal heat output	6,3 kW
Min-Max heat output	3-8,5 kW
Heating capacity	45-180 m ³
Wood load / h	1,9 kg
Flue draft	11 Pa
Flue gas temp. at nominal heat output	223 ° C
Gas flow	5,9 g/s

Emission of combustion products

CO % (at 13 % O ₂)	0,0638
CO mg/Nm ³	797
Nox mg/Nm ³	153
VOC mg/Nm ³	69
Dust mg/Nm ³	22
Test standard	EN 13240
Test report number	30-16552/T
Date	3/13/2023